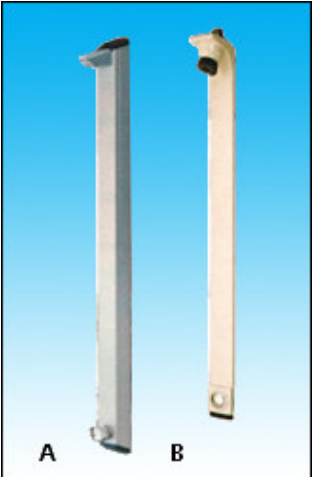


Description	Operating Criteria	Model	
<p>A. Push-button shower valve for blended or cold water. Automatic time delayed shut-off 30 sec. Bottom or back inlet. Brushed aluminium panel with chrome button and vandal resistant rose.</p> <p>B. For blended or cold water, top inlet 20mm, with Ballofix. Adjustable rose. Automatic time delayed shut-off 30 sec. Brushed chrome or white epoxy finish.</p>	<p>Flow Regulator 10 l/min. Other flow rates possible on request. Minimum pressure 50 kPa.</p> <p>Flow Regulator 10 l/m. Other flow rates possible on request. Minimum pressure 100 kPa.</p>	<p>A. 500S PAP Shower Panel</p> <p>B. DL 400S Shower Panel</p>	
<p>Ready to Fit stainless steel panel complete with Presto P 50 push button shower valve and 29110 vandal resistant rose. For blended Water</p> <p>Above but with Alpha MIXER for hot and cold supplies</p> <p>More "Ready to Fit" units and panels available, including corner panels, white panels are available</p>	<p>Flow Regulator 10 l/m. Other flow rates possible on request. Minimum pressure 50kPa.</p>	<p>109 panel,</p> <p>109 panel (88320)</p>	