
TECHNICAL DATA SHEET

704-95



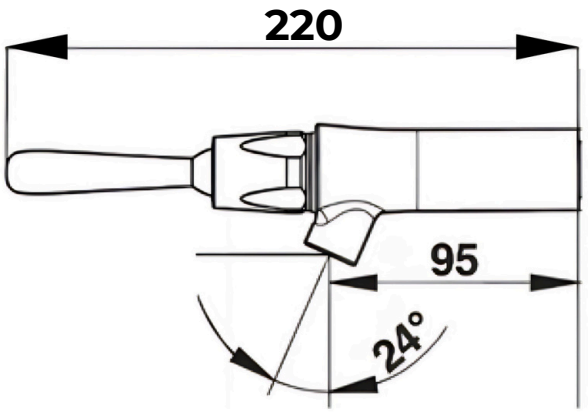

Working Pressure:
- 1 to 5 bar

Flow:
- 4.5 L/min at 3 bar - factory setting
- 4-position flow setting
- Anti-water-hammering design

Flow Time:
- 7 ± 2.5 seconds

Operation:
- Simply press on the lever to activate the water flow

Hydraulic Supply:
- G 1/2" - Cold or premixed water

Thermal Resistance:
- Resists up to 75°C for 30 minutes

Delivered with:
- Flat wall flange, 1 coloured lever (red or blue), instruction manual

Standards and Approvals:
- Acoustic class II
- Brass body is in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated body that is in accordance with EN 12540
- Has 200-hour neutral salt spray resistance (NSS) in accordance with ISO 9227
- Brass body meets the DZR and Low Lead requirements

A.L. BYRNE WATERWAYS™

Lead Free